



# PE Valve

PE Valve

## 1707-2 Valve


4 way valve, 10.1 to 20.4 tons, 1-3/8" ODF connections  
1700 Series 4 way Valves 6.1 to 175 tons 7/8" thru 3-1/8" Line Sizes

Â

**This series valve is available as a pressure differential pilot actuated valve as well as an Actuator driven valve**

Â

In the NORMAL POSITION, discharge is routed to the main condenser and the auxiliary is pumped out. No solenoid valve is needed. In the ENERGIZED POSITION, discharge is routed to the auxiliary condenser and the return routed to the main condenser. No check valve is needed. The pump out is closed. This diagram is a typical heat reclaim configuration.

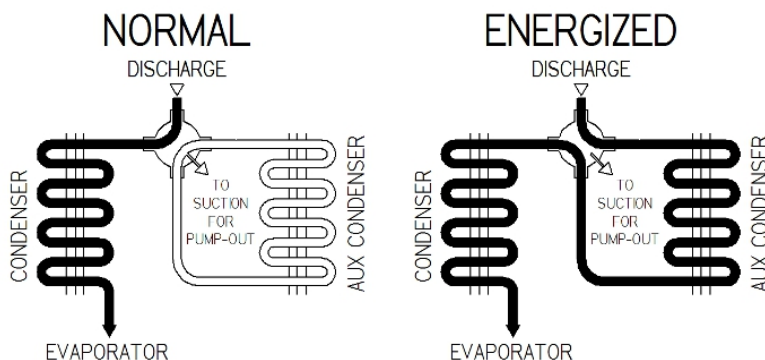



[Vendor Information](#)